



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
25.04.2001 Bulletin 2001/17

(51) Int Cl.7: **H01Q 9/04, H01Q 5/00,
H01Q 1/40**

(21) Application number: **00660183.5**

(22) Date of filing: **09.10.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Annamaa, Petteri**
90420 Oulu (FI)
• **Mikkola, Jyrki**
90450 Kempele (FI)

(30) Priority: **20.10.1999 FI 992268**

(74) Representative: **Kupiainen, Juhani**
c/o Oulun Patenttitoimisto, Berggren Oy Ab,
Teknologiantie 14 D
90570 Oulu (FI)

(71) Applicant: **Filtronic LK Oy**
90440 Kempele (FI)

(54) **Internal antenna for an apparatus**

(57) The invention relates to an antenna structure to be installed inside small-sized radio apparatus. A conventional PIFA-type structure is extended such that on top of the ground plane (210) there will be instead of one at least two radiating planes (220, 230) on top of each other. There is between them dielectric material (240) to reduce the size of the lower radiator and to improve the band characteristics. Likewise, there is dielectric material (250) on top of the uppermost radiating plane

so as to bring one resonance frequency of the antenna relatively close to another resonance frequency in order to widen the band. Advantageously the radiating planes are in galvanic contact (203) with each other. The invention accomplishes a greater increase in the antenna bandwidth as compared to that achieved by placing the only radiating plane at a distance from the ground plane equal to that of the upper radiating plane according to the invention.

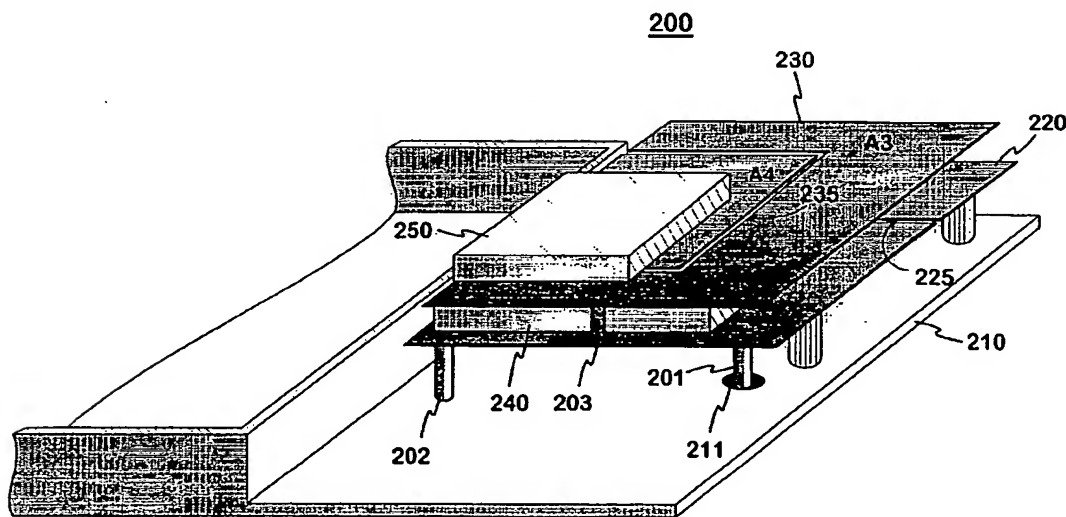


Fig. 2

Description

[0001] The invention relates to an antenna structure to be installed inside small-sized radio apparatus.

[0002] In portable radio apparatus it is very desirable that the antenna be located inside the covers of the apparatus, for a protruding antenna is impractical. In modern mobile stations, for example, the internal antenna naturally has to be small in size. This requirement is further emphasized as mobile stations become smaller and smaller. Furthermore, in dual-band antennas the upper operating band at least should be relatively wide, especially if the apparatus in question is meant to function in more than one system utilizing the 1.7- 2 GHz band.

[0003] When aiming at a small-sized antenna the most common solution is to use a PIFA (planar inverted F antenna). The performance, such as bandwidth and efficiency, of such an antenna functioning in a given frequency band or bands depends on its size: The bigger the size, the better the characteristics, and vice versa. For example, decreasing the height of a PIFA, i.e. bringing the radiating plane and ground plane closer to each other, markedly decreases the bandwidth. Likewise, reducing the antenna in the directions of breadth and length by making the physical lengths of the elements smaller than their electrical lengths especially degrades the efficiency.

[0004] Fig. 1 shows an example of a prior-art dual-band PIFA. Depicted in the figure is the frame 110 of the apparatus in question which is drawn horizontal and which functions as the ground plane of the antenna. Above the ground plane there is a planar radiating element 120 supported by insulating pieces, such as 105. Between the radiating element and ground plane there is a short-circuit piece 102. The radiating element 120 is fed at a point F through a hole 103 in the ground plane. In the radiating element there is a slot 125 which starts from the edge of the element and extends to near the feed point F after having made two rectangular turns. The slot divides the radiating element, viewed from the feed point F, into two branches A1 and A2 which have different lengths. The longer branch A1 comprises in this example the main part of the edge regions of the radiating element, and its resonance frequency falls on the lower operating band of the antenna. The shorter branch A2 comprises the middle region of the radiating element, and its resonance frequency falls on the upper operating band of the antenna. The disadvantage of structures like the one described in Fig. 1 is that the tendency towards smaller antennas for compact mobile stations will in accordance with the foregoing degrade the electrical characteristics of an antenna too much.

[0005] The object of the invention is to reduce the aforementioned disadvantages associated with the prior art. The structure according to the invention is characterized by what is expressed in the independent claim 1. Preferred embodiments of the invention are present-

ed in the other claims.

[0006] The basic idea of the invention is as follows: A conventional PIFA type structure is extended in such a manner that instead of one there will be at least two radiating planes on top of each other above the ground plane. Between them there is dielectric material in order to reduce the size of the lower radiator and to improve band characteristics. Likewise, there is dielectric material on top of the uppermost radiating plane. This top layer is used to bring one resonance frequency of the antenna relatively close to another resonance frequency in order to widen the band. The upper radiating plane is galvanically connected to the lower radiating plane.

[0007] An advantage of the invention is that it achieves a greater increase in the antenna bandwidth than what would be achieved by placing the only radiating plane at a distance from the ground plane equal to that of the upper radiating plane according to the invention. This is due to the use of multiple resonance frequencies close to each other. Other advantages of the invention include relatively good manufacturability and low manufacturing costs.

[0008] The invention will now be described in detail. Reference will be made to the accompanying drawings in which

Fig. 1 shows an example of a prior-art PIFA,
 Fig. 2 shows an example of the antenna structure according to the invention,
 Fig. 3 shows an example of the characteristics of the antenna according to the invention,
 Fig. 4 shows a second embodiment of the invention,
 Fig. 5 shows a third embodiment of the invention,
 Fig. 6 shows a fourth embodiment of the invention, and
 Fig. 7 shows an example of a mobile station equipped with an antenna according to the invention.

[0009] Fig. 1 was already discussed in connection with the description of the prior art.

[0010] Fig. 2 shows an example of the antenna structure according to the invention. An antenna 200 comprises a ground plane 210, on top of that a first radiating element 220 and further on top of that a second radiating element 230. The words "on top" and "uppermost" refer in this description and in the claims to the relative positions of the component parts of the antenna when they are horizontal and the ground plane is the lowest. Between the ground plane and first radiating element there is mainly air and a little supporting material having a low dielectric constant. Between the first and second radiating element there is a first dielectric board 240 having a relatively high dielectric constant. On top of the second radiating element there is a second dielectric board 250. The inner conductor 201 of the antenna feed line is connected at a point F to the first radiating plane 220 through a hole 211 in the ground plane. In accordance

with the PIFA structure, the first radiating plane is connected to ground by means of a first short-circuit conductor 202. Furthermore, the first and second radiating planes are galvanically connected. In the example of Fig. 2, this connection is realized by means of a second short-circuit conductor 203 in the area between the feed point F and short-circuit conductor 202. The second radiating plane 230 is fed partly galvanically through short-circuit conductor 203 and partly electromagnetically from the first plane 220.

[0011] In the exemplary structure depicted in Fig. 2 the both radiating planes comprise two branches: The first radiating plane 220 has a slot 225 which divides it into two branches having different resonance frequencies. Let these resonance frequencies be f_1 and f_2 , of which f_2 is higher. The second radiating plane 230 has a slot 235 which divides it into two branches A3 and A4 having different resonance frequencies. Let these resonance frequencies of the upper radiating plane be f_3 and f_4 , of which f_4 is higher. The dielectric board 250 is located on top of branch A4. That and the size of branch A4 are utilized to bring resonance frequency f_4 to so near resonance frequency f_2 that the operating bands corresponding to the frequencies f_2 and f_4 form a continuous, wider operating band. Moreover, the dielectric board 250 improves the reliability of oscillation of branch A4.

[0012] Fig. 3 shows a curve 31 depicting a reflection coefficient S 11 as a function of frequency f for an antenna built according to the invention. The exemplary antenna is adapted so as to have four resonance frequencies as above in the structure of Fig. 2. The first resonance r_1 appears at $f_1 = 0.8$ GHz, the second resonance r_2 at $f_2 = 1.66$ GHz, the third resonance r_3 at $f_3 = 0.94$ GHz, and the fourth resonance r_4 appears at $f_4 = 1.87$ GHz. The reflection coefficient peaks are, respectively, 14 dB, 21 dB, 7½ dB and 12 dB. The operating frequency bands corresponding to resonances r_1 and r_3 are separate. The coupling between antenna elements corresponding to resonances r_2 and r_4 results in a fifth resonance r_5 the frequency of which falls between f_2 and f_4 . Together the frequency bands corresponding to resonances r_2 , r_4 and r_5 constitute a wide operating frequency band. This frequency band will be about 1.6 to 1.9 GHz if a reflection coefficient of 5 dB is used as the band limit criterion. The bandwidth B is thus about 300 MHz, which is 17% in relation to the center frequency of the band. This is clearly more than the bandwidth achieved by a prior-art antenna of the same size.

[0013] Fig. 4a is an overhead view of an embodiment of the invention nearly similar to that of Fig. 2. There is shown a first radiating element 420, second radiating element 430, first dielectric board 440 and a second dielectric board 450. A slot 425 divides the first and slot 435 the second radiating element into two branches. The second radiating element is in this example nearly as large as the first. They are connected at the edge of the structure by a second short-circuit conductor 403.

The first dielectric board has a dielectric constant ϵ_1 and the second dielectric board has a dielectric constant ϵ_2 . The difference from Fig. 2 is that the second dielectric board is now located on top of the longer branch A3 of the second radiating element.

[0014] Fig. 4b shows the structure of Fig. 4a viewed from its left side. There is shown in addition to the aforementioned parts a ground plane 410, inner conductor 401 of the antenna feed line, and a first short-circuit conductor 402 between the ground plane and first radiating element. A short-circuit conductor 403 between the first and second radiating element advantageously starts from the area between the inner conductor 401 and first short-circuit conductor. Additionally, Fig. 4b shows that the insulator between the ground plane and first radiating element is air.

[0015] Fig. 5a is an overhead view of an embodiment of the invention with three radiating elements on top of each other. At the bottom there is a first radiating element 520 which has two branches. In the middle there is a second radiating element 530 which is continuous and smaller than the first radiating element. At the top there is a third radiating element 560 which has two branches and is even smaller than the second radiating element. Between the first and second radiating element there is a first dielectric board 540, and between the second and third radiating element there is a second dielectric board 550. On top of the shorter branch of the third radiating element there is a third dielectric board 570. At the edge of the structure there is a second short-circuit conductor 503 between the first and second radiating element, and a third short-circuit conductor 504 between the second and third radiating element.

[0016] Fig. 5b shows the structure of Fig. 5a viewed from its left side. There is shown in addition to the aforementioned parts a ground plane 510, inner conductor 501 of the antenna feed line, and a first short-circuit conductor 502 between the ground plane and first radiating element. The structure according to Figs. 5a, 5b can be used to realize e.g. a three-band antenna, in which one of the bands is especially widened, or a dual-band antenna, in which one or both of the bands are especially widened.

[0017] Fig. 6a is an overhead view of an embodiment of the invention with two radiating elements on top of each other. It differs from the structure of Fig. 4 in that the second radiating element 630 is continuous and is not in galvanic contact with the first radiating element 620. So, in this example the second radiating element is parasitic. Fig. 6b shows the structure of Fig. 6a viewed from its left side. There is shown in addition to the aforementioned parts a ground plane 610, inner conductor 601 of the antenna feed line, and a first short-circuit conductor 602 between the ground plane and first radiating element.

[0018] Fig. 7 shows a mobile station 700. It includes an antenna 200 according to the invention, located in this example entirely within the covers of the mobile sta-

tion.

[0019] Above it was described an antenna structure according to the invention and some of its variations. The invention is not limited to them as regards the design and number of radiating elements and the placement of dielectric material. Furthermore, the invention does not limit other structural solutions of the planar antenna nor its manufacturing method. The inventional idea may be applied in various ways within the scope defined by the independent claim 1.

element, whereby the space between the first radiating element and said ground plane comprises substantially air, and there is between the second radiating element and first radiating element material the dielectric constant of which is at least ten, and there is on top of the uppermost radiating element a layer of dielectric material.

Claims

1. An antenna structure comprising a first planar radiating element (220) and a ground plane, **characterized** in that it further comprises on top of the first radiating element at least a second radiating element (230) whereby
 - the space between the first radiating element and said ground plane comprises substantially air,
 - between the second radiating element and first radiating element there is material (240) the dielectric constant of which is at least ten, and
 - on top of the uppermost radiating element there is a layer of dielectric material (250).
2. The structure of claim 1, **characterized** in that between said first and second radiating element there is a second short-circuit conductor (203) to provide galvanic coupling.
3. The structure of claim 2, wherein the feed conductor (201) of said antenna structure is in galvanic contact with the first radiating element and there is between the latter and said ground plane a first short-circuit conductor (202), **characterized** in that in the first radiating element the connection point of said second short-circuit conductor (203) is located in the area between the connection point (F) of said feed conductor and the connection point of said first short-circuit conductor (202).
4. The structure of claim 1, **characterized** in that at least one of said radiating elements comprises two branches (A3, A4) which have substantially different resonance frequencies.
5. The structure of claim 1, **characterized** in that at least one (630) of said radiating elements is parasitic.
6. A radio apparatus (700) comprising an antenna (200) having a first radiating element and a ground plane, **characterized** in that on top of the first radiating element there is at least a second radiating

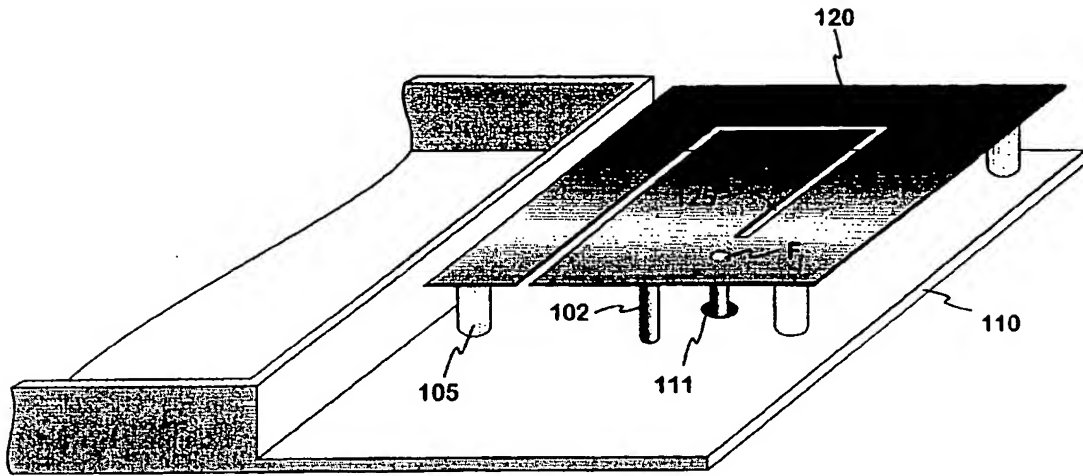


Fig. 1

PRIOR ART

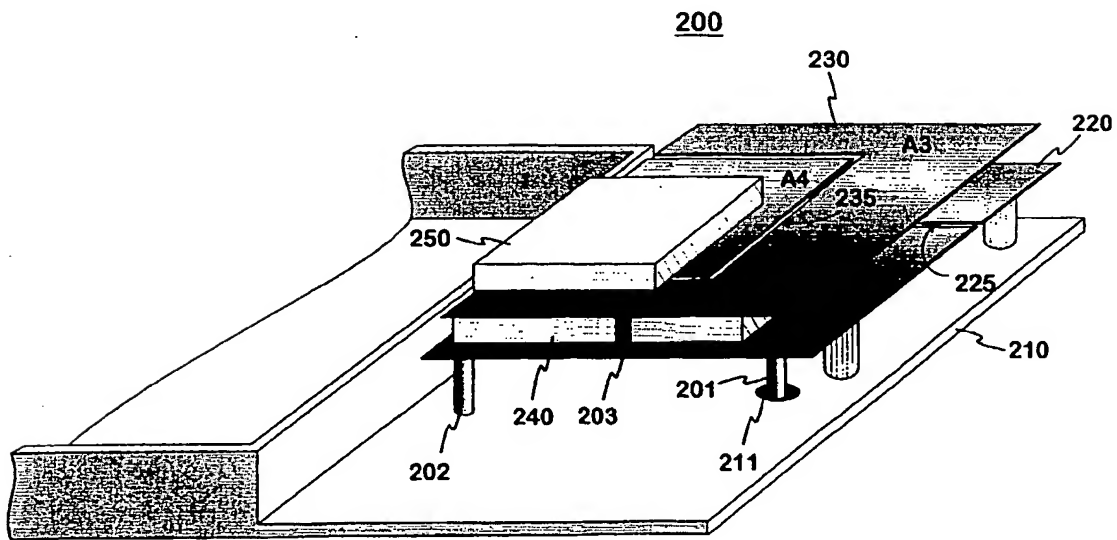


Fig. 2

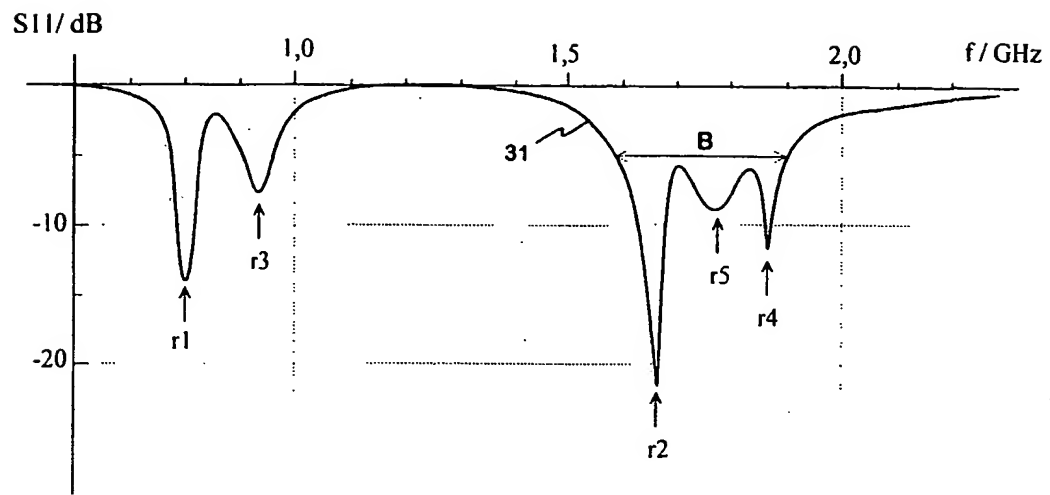


Fig. 3

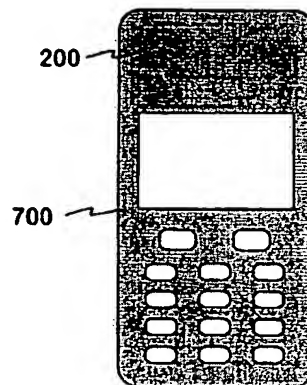


Fig. 7

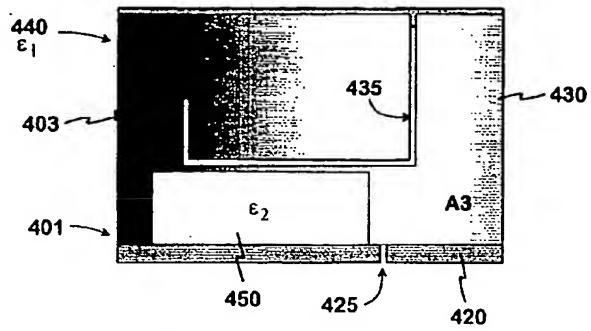


Fig. 4a

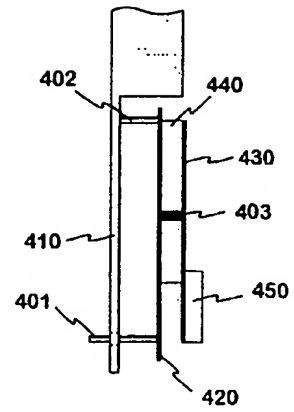


Fig. 4b

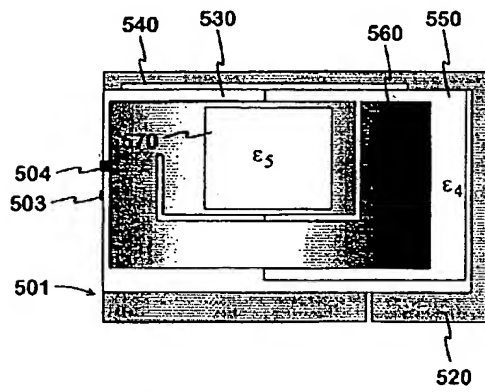


Fig. 5a

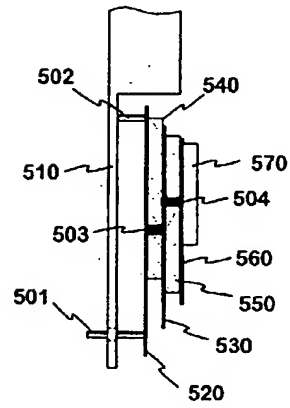


Fig. 5b

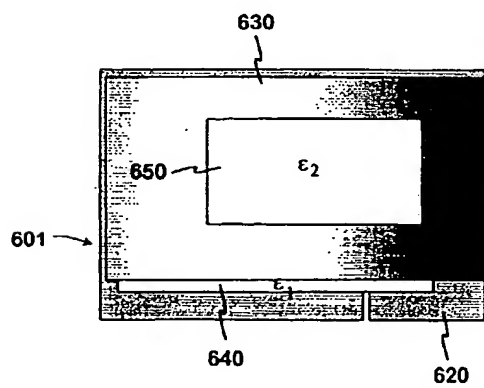


Fig. 6a

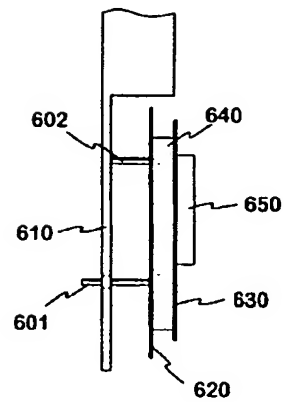


Fig. 6b



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
04.07.2001 Bulletin 2001/27

(51) Int Cl.7: **H01Q 9/04, H01Q 5/00,
H01Q 1/40**

(43) Date of publication A2:
25.04.2001 Bulletin 2001/17

(21) Application number: **00660183.5**

(22) Date of filing: **09.10.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Annamaa, Petteri**
90420 Oulu (FI)
• **Mikkola, Jyrki**
90450 Kempele (FI)

(30) Priority: **20.10.1999 FI 992268**

(74) Representative: **Kupiainen, Juhani**
c/o Oulun Patenttitoimisto, Berggren Oy Ab,
Teknologiantie 14 D
90570 Oulu (FI)

(71) Applicant: **Filttronic LK Oy**
90440 Kempele (FI)

(54) **Internal antenna for an apparatus**

(57) The invention relates to an antenna structure to be installed inside small-sized radio apparatus. A conventional PIFA-type structure is extended such that on top of the ground plane (210) there will be instead of one at least two radiating planes (220, 230) on top of each other. There is between them dielectric material (240) to reduce the size of the lower radiator and to improve the band characteristics. Likewise, there is dielectric material (250) on top of the uppermost radiating plane

so as to bring one resonance frequency of the antenna relatively close to another resonance frequency in order to widen the band. Advantageously the radiating planes are in galvanic contact (203) with each other. The invention accomplishes a greater increase in the antenna bandwidth as compared to that achieved by placing the only radiating plane at a distance from the ground plane equal to that of the upper radiating plane according to the invention.

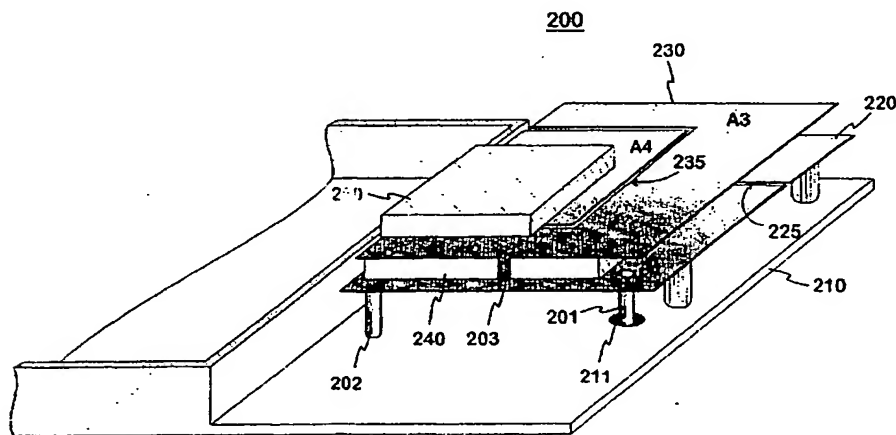


Fig. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 66 0183

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 279 050 A (BALL) 24 August 1988 (1988-08-24) * page 5, line 39 - page 6, line 41; figures 2,7,8; table I *	1,2,5,6	H01Q9/04 H01Q5/00 H01Q1/40
Y	US 5 945 950 A (ELBADAWY) 31 August 1999 (1999-08-31) * column 2, line 56 - column 3, line 36; figures 3,4 *	1,2,5,6	
A	EP 0 777 295 A (NTT MOBILE COMMUNICATIONS) 4 June 1997 (1997-06-04) * abstract; figures 1-15 *	1-6	
A	US 5 124 733 A (HANEISHI) 23 June 1992 (1992-06-23) * abstract; figures 1-8 *	1-6	
A	US 5 453 754 A (FRAY) 26 September 1995 (1995-09-26) * column 3, line 20 - line 54; figures 2,5 *	1	
A	EP 0 871 238 A (NOKIA MOBILE PHONES) 14 October 1998 (1998-10-14) * abstract; figures 1-5 *	4	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 May 2001	Examiner Angrabeit, F
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.92 (P04/001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 66 0183

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-05-2001

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0279050	A	24-08-1988	US	4835538 A	30-05-1989
			AT	92673 T	15-08-1993
			CA	1287917 A	20-08-1991
			DE	3786913 A	09-09-1993
			DE	3786913 T	10-03-1994
			JP	63189002 A	04-08-1988

US 5945950	A	31-08-1999	TW	381358 B	01-02-2000
			WO	9818177 A	30-04-1998

EP 0777295	A	04-06-1997	CA	2190792 A	30-05-1997
			CN	1159664 A	17-09-1997
			JP	9214244 A	15-08-1997
			US	5917450 A	29-06-1999

US 5124733	A	23-06-1992	JP	3263903 A	25-11-1991

US 5453754	A	26-09-1995	GB	2268626 A	12-01-1994
			DE	69327622 D	24-02-2000
			DE	69327622 T	08-06-2000
			EP	0587247 A	16-03-1994
			ES	2141126 T	16-03-2000

EP 0871238	A	14-10-1998	FI	971235 A	26-09-1998
			US	6008764 A	28-12-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82